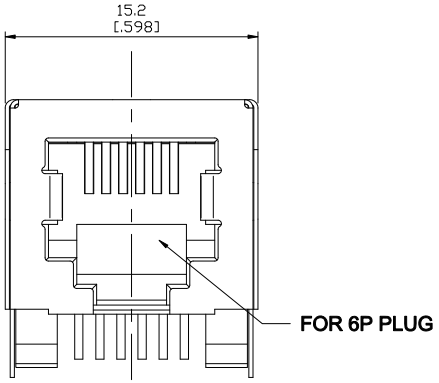

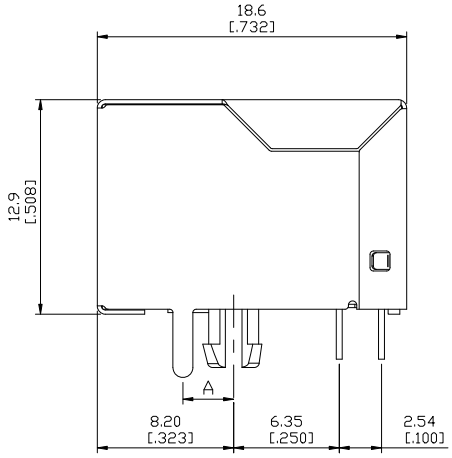

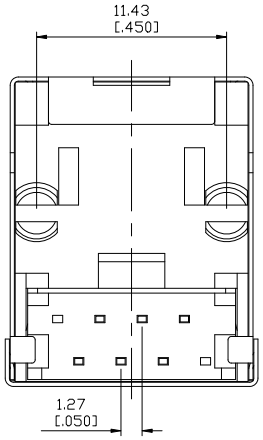

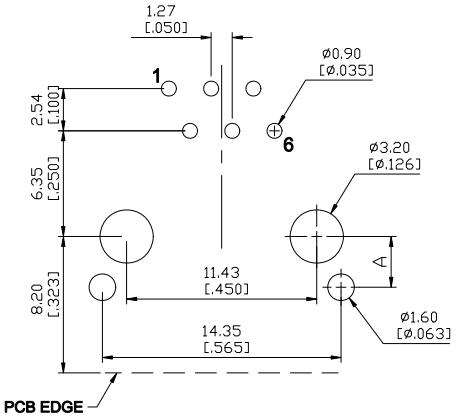

RECOMMENDED PCB LAYOUT
TOP VIEW

Electrical Characteristics :
Insulation Resistance : 500MΩ Min.
Contact Resistance : 50mΩ Max.
Withstand Voltage : 1000 VAC 1 minute.
Current Rating : 1.5A

Material:
Housing: Thermoplastic UL 94V-0
Contact : Selective Gold Plating
Terminal: 0.35mm Thickness Phosphor Bronze
Plated With Gold And Tin In Solder Area.
Shielded: Brass ,Nickel Plating
CUL File No : E215573

PART NO : 8 3 8 6 C - B ∗ 1 ∗ S

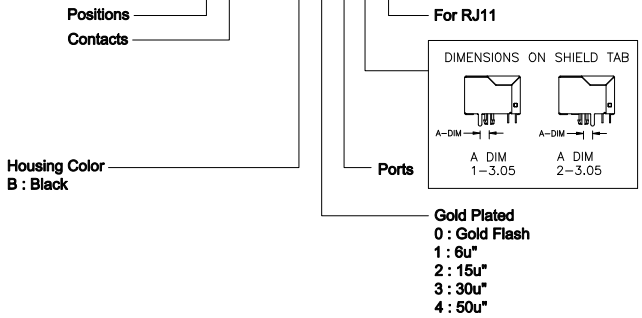

CHAMPWAY 冠泰電子有限公司
CHAMPWAY ELECTRONICS CO., LTD.

ZONE	REV.	DESCRIPTION	DATE	APPD.
Ⓐ				
Ⓑ				
Ⓒ				
Ⓓ				
Ⓔ				

FILE NO : 83 (SERIES)

TOLERANCE (公差) :
0.000 mm ± 0.075mm
0.00 mm ± 0.15mm
0.0 mm ± 0.25mm

TITLE 圖 名	RJ11,Shielded,Receptacle Horizontal,1 Port,THT (for 6P Plug)			UNIT 單位	mm inch
PART NO. 料 號	8386C-B∗1∗S			SCALE 比 例	1 : 1
REV. 版 本	A.0	DATE 日 期	2009-09-25		
CHECKED BY 審 核	Aaron		DRAWN BY 製 圖	Eric	