

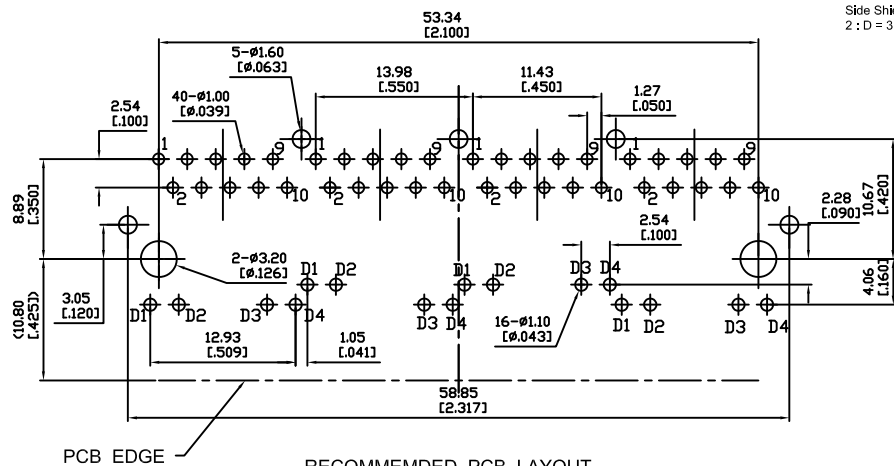
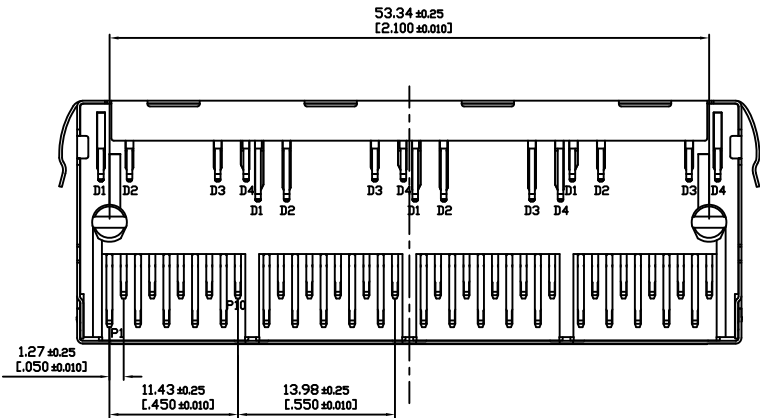
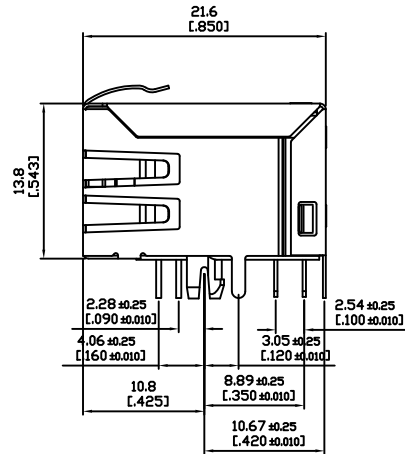
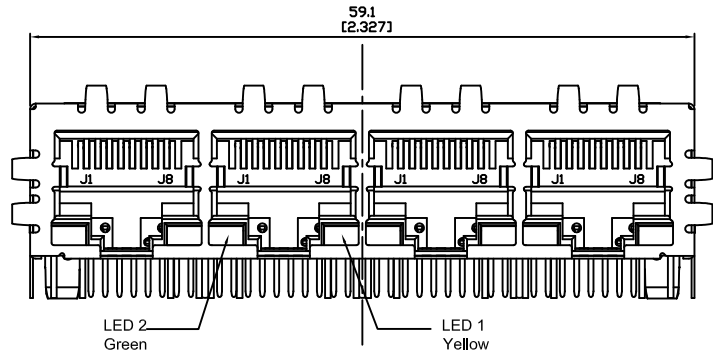


1. MECHANICAL DIMENSIONS:

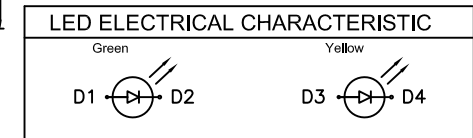

Note:

- 1.Housing: Thermoplastic UL 94V-0
- 2.Contact : Selective Gold Plating
- 3.Terminal: 0.35mm Thickness Copper Alloy Plated With Gold And Tin In Solder Area.
- 4.Shielded: Copper Alloy,Nickel Plating
- 5.Operating Temperature Range : 0°C~70°C

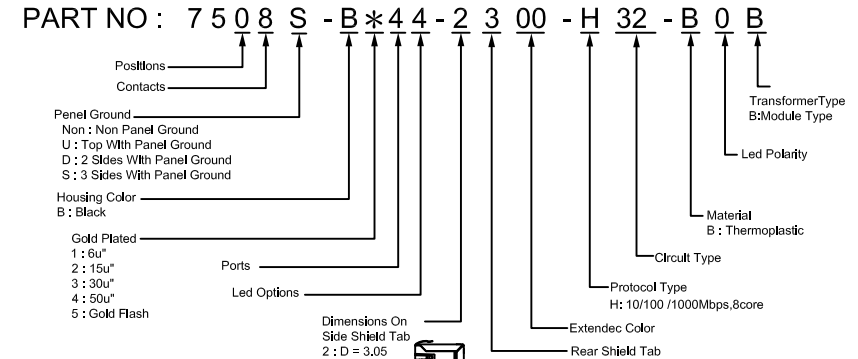

ZONE	REV.	DESCRIPTION	DATE	DWG.	FILE NO : 75 (SERIES)
					TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm

TITLE	RJ45 Connector,Shielded, With Led With Transformer, 1000 Mbps Fiter		UNIT	mm
圖名			單位	inch
PART NO.	7508S-B*44-2300-H32-B0B		SCALE	1:1
料號			比例	
REV.	A.0	DATE	2014-02-19	
版本		日期		
CHECKED BY	Jay		DRAWN BY	Sword
審核			製圖	

